



3H/LM CiTiceL[®]

Performance Characteristics


Nominal Range	0-200ppm
Maximum Overload	1000ppm
Expected Operating Life	One year in air
Output Signal	0.37 ± 0.07 µA/ppm
Resolution	0.25ppm
Temperature Range	-40°C to +50°C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	0.008 ± 0.002 % signal/mBar
T₉₀ Response Time	≤70 seconds
Relative Humidity Range	15 to 90% non-condensing
Typical Baseline Range (pure air)	-0.6 to +1.9ppm equivalent
Maximum Zero Shift (+20°C to +40°C)	2ppm equivalent
Long Term Output Drift	<2% signal loss/month
Recommended Load Resistor	10Ω
Bias Voltage	Not required (See Application Note #7)
Repeatability	1% of signal
Output Linearity	Linear

N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

Physical Characteristics

Colour of Ring	Dark Blue
Weight	22g
Position Sensitivity	None
Storage Life	Six months in CTL container
Recommended Storage Temperature	0-20°C
Warranty Period	12 months form date of despatch

Outline Dimensions

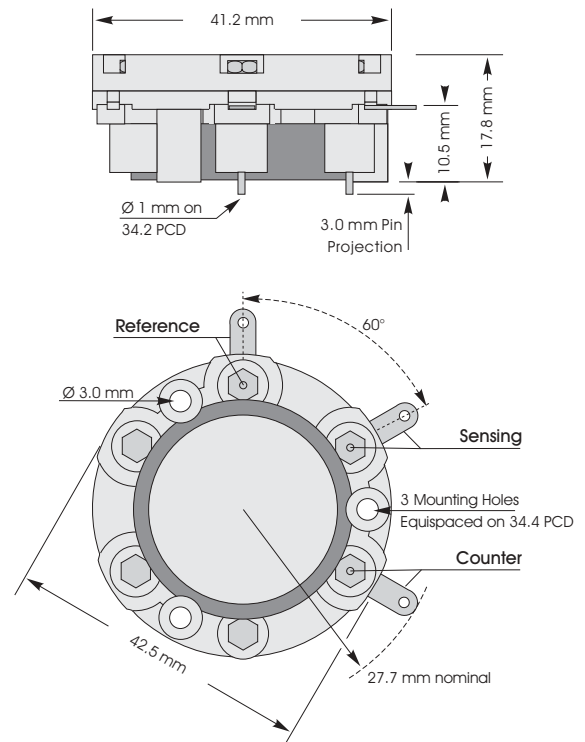

Testing

3H/LM Hydrogen Sulphide CiTiceLs should be tested monthly to confirm sensitivity and response time are adequate.

Ordering Information


The 3H/LM Hydrogen Sulphide CiTiceL is available with both PCB pins and side tags. To ensure the appropriate option is supplied care must be taken to provide the correct code when ordering.

With side tag and PCB pin connections - **3H/LM**

Hydrogen sulphide CiTiceL[®] Specification



3H/LM Hydrogen Sulphide - Output vs Temperature

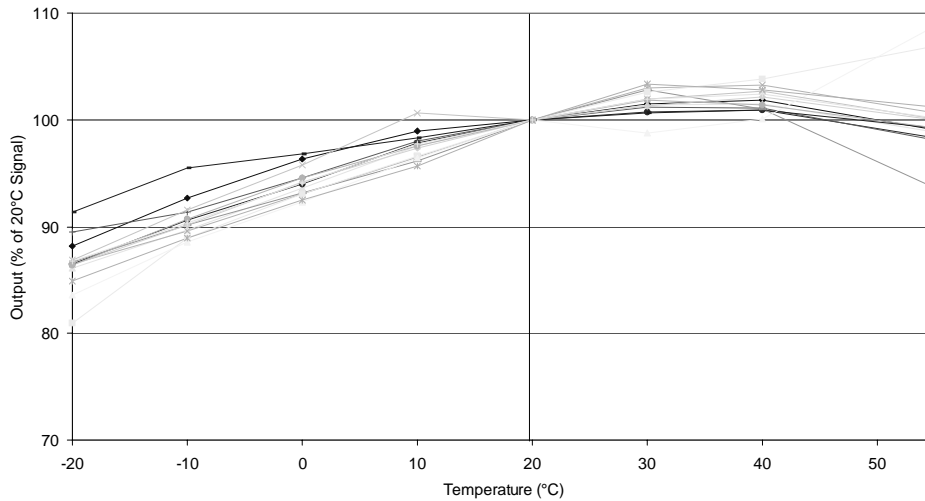

Cross-sensitivity Data

CiTiceLs may exhibit a response to certain gases in a sample other than the target gas. 3H/LM CiTiceLs have been tested with a number of commonly cross-interfering gases and the results are given below. The table shows the typical response to be expected from a sensor when exposed to a given test gas concentration (relevant to safety, e.g. TLV levels).

<u>Gas</u>	<u>Conc.</u>	<u>3H/LM</u>	<u>Gas</u>	<u>Conc.</u>	<u>3H/LM</u>
Carbon monoxide:	300ppm	≤6ppm	Hydrogen:	10,000ppm	<15ppm
Sulphur dioxide:	5ppm	<1ppm	Hydrogen cyanide:	10ppm	-2<x\$<0ppm
Nitric oxide:	35ppm	≤4ppm	Hydrogen chloride:	5ppm	0ppm
Nitrogen dioxide:	5ppm	≈-1ppm	Ethylene:	100ppm	0ppm
Chlorine:	5ppm	-0.25<x\$<+0.25ppm			

For details of other possible cross-interfering gases contact City Technology.

Methanol Sensitivity

The 3H/LM CiTiceL is designed for use in applications where methanol might be present. Whilst cross sensitivity reactions on CiTiceLs are normally readily defined, the behavior of the 3H/LM when exposed to methanol is significantly more complex, and can not be specified as above for carbon monoxide. The 3H/LM CiTiceL is the result of an extensive development project, which has achieved, for this application, a significant performance advantage over standard 3H CiTiceLs.

For more detailed information about the response to methanol please contact Technical Support at City Technology.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time.